


PRODUCT FEATURES

- Simple contemporary tear shape silhouette
- Five rich color options
- Five complementary Fire family pendants also available from Tech Lighting
- Fully dimmable halogen or LED lamping to create the desired ambiance in your unique space
- Halogen or LED lamp included saving you time and money
- Protected by a 1-year warranty



LAMPING

Includes low-voltage, 50 watt halogen bi-pin lamp or 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module and six feet of field-cutable cable. Dimmable with low-voltage electronic or magnetic dimmer (based on transformer).

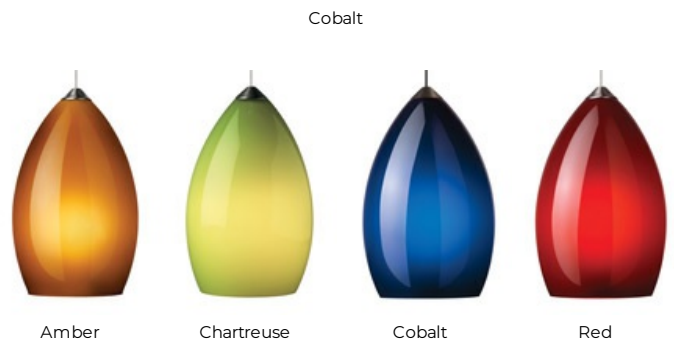

To view all available finish options, please visit techlighting.com

ORDERING INFORMATION

| 700 | SYSTEM | FIRF | COLOR | FINISH | LAMP |
|-----|--------------------------|------|------------|------------------|---|
| | FJ FREEJACK | A | AMBER | Z ANTIQUE BRONZE | 12 VOLT HALOGEN (T20) |
| | KL KABLE LITE | H | CHARTREUSE | C CHROME | -24 24 VOLT HALOGEN |
| | MP MONOPOINT | B | COBALT | S SATIN NICKEL | -LEDS930 12 VOLT LED 90 CRI 3000K (T20/T24) |
| | MO MONORAIL | R | RED | | -24 24 VOLT HALOGEN |
| | MO2 TWO-CIRCUIT MONORAIL | W | WHITE | | |

Note: Note: MP includes 4" Round Flush Canopy.
 Antique Bronze is not available for Kable Lite
 Chrome not offered on Monorail & Two-Circuit Monorail.

700 _____ FIRF _____

JOB NAME _____


NOTES _____



FIREFROST PENDANT

SPECIFICATIONS

| | |
|-------------------------------|------------|
| HARDWARE MATERIAL | Metal |
| SHADE MATERIAL | Glass |
| NET WEIGHT | 2 lbs |
| HEIGHT | 7.3in |
| WIDTH | 4.5in |
| LENGTH | 4.5in |
| UP LIGHT / DOWN LIGHT / BOTH? | |
| WET LISTED | |
| DAMP LISTED | |
| DRY LISTED | |
| MIN. HANGING HEIGHT | 7.3in |
| MAX HANGING HEIGHT | 79.8in |
| SLOPED CEILING ADAPTABLE? | No |
| GENERAL LISTING | ETL Listed |
| INCLUDES | |

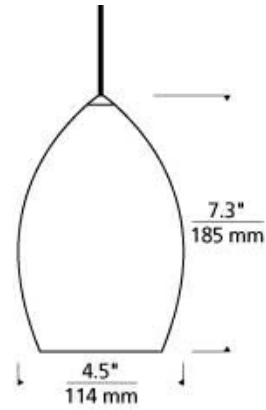

LAMPING SPECIFICATIONS

| | LED LAMP | INTEGRATED LED | NON LED | NO LAMP |
|-----------------------|-------------|----------------|-------------|---------|
| DELIVERED LUMENS | 300 | | | |
| WATTS | 8 | | 50 | |
| MAX WATTAGE PER BULB | 8W | | 50W | |
| INPUT VOLTAGE | 12V 120V | | 12V 120V | |
| DIMMING TYPE* | ELV | | ELV | |
| CCT | 3000K | | | |
| CRI | 90 CRI | | | |
| LED LIFETIME | | | | |
| L70 | | | | |
| AVERAGE BULB HOURS | 25000 | | | |
| FIELD SERVICEABLE LED | | | | |
| LAMP BASE | GU5.3 | | GY 6.35 | |
| LAMP SHAPE | LED Bi-Pin | | T4 | |
| LAMP INCLUDED? | Y | | Y | |
| WARRANTY** | 5 Years | | 1 Year | |

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

| | Integrated LED | Replacement LED Lamp | No Lamp * |
|--|----------------|----------------------|-----------|
| This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6. | | Yes | |
| This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California. | | Yes | |

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

