

# SPHERE FLUSH MOUNT

## PRODUCT FEATURES

- A beautiful spherical glass shade nested with a clean and modern back-plate
- The proprietary warm color dimming LED module gradually changes color from 3000K to 2200K to mimic the soft glow of traditional halogen lamping
- Dimmable with a standard incandescent dimmer or low-voltage electronic dimmer.
- Mount as a wall sconce or flush mount
- Sphere Flush Mounts are a great way to illuminate a hallway or add a touch of elegance to your space
- Protected by a 5-year warranty with integrated LED



## LAMPING

LED includes 15 watt 600 lumen 90 CRI warm color dimming 3000K-2200K LED module. Dimmable with a standard incandescent dimmer or low-voltage electronic dimmer. May also be mounted as a wall sconce. ADA compliant.

Clear



Clear

## ORDERING INFORMATION

| 700FMSPH | COLOR   | FINISH         | LAMP   |
|----------|---------|----------------|--|
|          | C CLEAR | S SATIN NICKEL | -LEDWD INTEGRATED LED 90 CRI 3000-2200K 120V |

700FMSPH \_\_\_\_\_

JOB NAME \_\_\_\_\_

NOTES \_\_\_\_\_


\_\_\_\_\_



# SPHERE FLUSH MOUNT

## SPECIFICATIONS

|                               |            |
|-------------------------------|------------|
| HARDWARE MATERIAL             |            |
| SHADE MATERIAL                |            |
| NET WEIGHT                    | 2.5 lbs    |
| HEIGHT                        | 4.7in      |
| WIDTH                         | 3in        |
| LENGTH                        | 4.7in      |
| UP LIGHT / DOWN LIGHT / BOTH? |            |
| WET LISTED                    |            |
| DAMP LISTED                   | Yes        |
| DRY LISTED                    |            |
| WALL / CEILING MOUNT          |            |
| SLOPED CEILING ADAPTABLE?     | No         |
| GENERAL LISTING               | ETL Listed |
| INCLUDES                      |            |

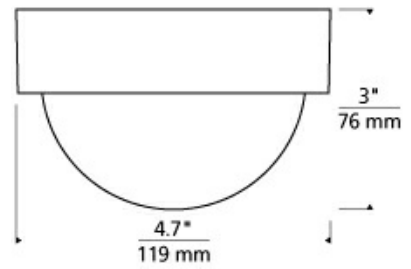

## LAMPING SPECIFICATIONS

|                       | LED LAMP | INTEGRATED LED | NON LED | NO LAMP |
|-----------------------|----------|----------------|---------|---------|
| DELIVERED LUMENS      |          | 600            |         |         |
| WATTS                 |          | 15             |         |         |
| MAX WATTAGE PER BULB  |          | 15W            |         |         |
| INPUT VOLTAGE         |          | 120V           |         |         |
| DIMMING TYPE*         |          | ELV            |         |         |
| CCT                   |          | 3000K-2200K    |         |         |
| CRI                   |          | 90 CRI         |         |         |
| LED LIFETIME          |          |                |         |         |
| L70                   |          |                |         |         |
| AVERAGE BULB HOURS    |          | 35000          |         |         |
| FIELD SERVICEABLE LED |          |                |         |         |
| LAMP BASE             |          | Integrated LED |         |         |
| LAMP SHAPE            |          | Integrated LED |         |         |
| LAMP INCLUDED?        |          | Y              |         |         |
| WARRANTY**            |          | 5 Years        |         |         |

\*Dimming information available at [www.techlighting.com/Downloads#dimming](http://www.techlighting.com/Downloads#dimming)  
 \*\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

## T20 / T24 INFORMATION

|  | Integrated LED | Replacement LED Lamp | No Lamp * |
|--|----------------|----------------------|-----------|
| This product can be used to comply with California Building Energy Efficiency Standards 2016 <b>Title 24</b> Part 6.                                 |                |                      |           |
| This product can be used to comply with California Appliance Efficiency Standards 2016 <b>Title 20</b> and may be shipped to and sold in California. |                |                      |           |

\* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

