

MONORAIL 2" X 4" RECTANGULAR DIRECT-END POWER FEED



PRODUCT FEATURES



LAMPING

The low-voltage leads from the remote transformer are connected to the canopy leads inside the junction box.

MonoRail 2" x 4" Rectangular Direct-End Power Feed



MonoRail 2" x 4" Rectangular Direct-End Power Feed

ORDERING INFORMATION

700MOPRCD SHAPE OR SIZE

2X4" RECTANGLE DIRECT END POWER FEED

FINISH

Z ANTIQUE BRONZE
S SATIN NICKEL

700MOPRCD _____

JOB NAME _____

NOTES _____




MONORAIL 2" X 4" RECTANGULAR DIRECT-END POWER FEED



SPECIFICATIONS

| | |
|-------------------|------------|
| HARDWARE MATERIAL | |
| SHADE MATERIAL | |
| NET WEIGHT | 0.93 lbs |
| HEIGHT | 4.5in |
| WIDTH | 1.3in |
| LENGTH | 1.3in |
| WET LISTED | |
| DAMP LISTED | |
| DRY LISTED | |
| GENERAL LISTING | ETL Listed |
| INCLUDES | |

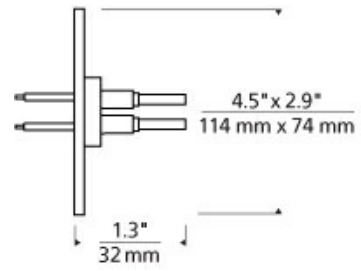

LAMPING SPECIFICATIONS

| | LED LAMP | INTEGRATED LED | NON LED | NO LAMP |
|-----------------------|----------|----------------|---------|---------|
| DELIVERED LUMENS | | | | |
| WATTS | | | | |
| MAX WATTAGE PER BULB | | | | |
| INPUT VOLTAGE | | | 0V | |
| DIMMING TYPE* | | | | |
| CCT | | | | |
| CRI | | | | |
| LED LIFETIME | | | | |
| L70 | | | | |
| AVERAGE BULB HOURS | | | | |
| FIELD SERVICEABLE LED | | | | |
| LAMP BASE | | | | |
| LAMP SHAPE | | | | |
| LAMP INCLUDED? | | | Y | |
| WARRANTY** | | | 1 Year | |

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

| | Integrated LED | Replacement LED Lamp | No Lamp * |
|--|----------------|----------------------|-----------|
| This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6. | | | N/A |
| This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California. | | | N/A |

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

