

K-TELESCOPE HEAD

PRODUCT FEATURES

LAMPING

For cable separations of 1" to 48". Head rotates 330° and has swivel and pivot action to direct the beam. Low-voltage, MR16 lamp of up to 75 watts, (not included). For Kable Lite system only.



K-Telescope Head



K-Telescope Head

ORDERING INFORMATION

700KTEL16 FINISH

S SATIN NICKEL

700KTEL16 _____

JOB NAME _____


NOTES _____



K-TELESCOPE HEAD

SPECIFICATIONS

HARDWARE MATERIAL
SHADE MATERIAL
NET WEIGHT
HEIGHT
WIDTH
LENGTH
BEAM SPREAD
UP LIGHT / DOWN LIGHT / BOTH?
WET LISTED
DAMP LISTED
DRY LISTED
MIN. HANGING HEIGHT
MAX HANGING HEIGHT
TOTAL CORD LENGTH
SLOPED CEILING ADAPTABLE? N/A
GENERAL LISTING
INCLUDES

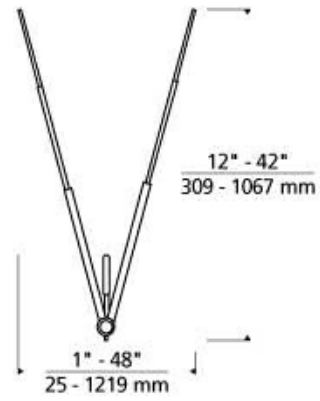

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS				
WATTS				
MAX WATTAGE PER BULB				
INPUT VOLTAGE				
DIMMING TYPE*				
CCT				
CRI				
LED LIFETIME				
L70				
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE				
LAMP SHAPE				
LAMP INCLUDED?				
WARRANTY**				

*Dimming information available at www.techlighting.com/Downloads#dimming
 ** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6.			
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

