

Surface Canopy for Vaulted Ceilings

700FJSF4V_

1.2



SINGLE PORT CANOPIES

GENERAL PRODUCT INFORMATION:



This product is ETL listed and suitable only for dry locations and approved for use at any height above the finished floor.


The mounting surface angle must not be greater than 40 degrees from horizontal.

Model numbers ending in “-LED” or “-LED277” can be dimmed with a low-voltage electronic dimmer, have a rated maximum output of 10 watts, and are compatible with LED elements.


All other model numbers can be dimmed with a standard incandescent dimmer, have a rated maximum output of 75 watts, and are not compatible with LED elements.



Installing the FreeJack Surface Canopy for Vaulted Ceilings

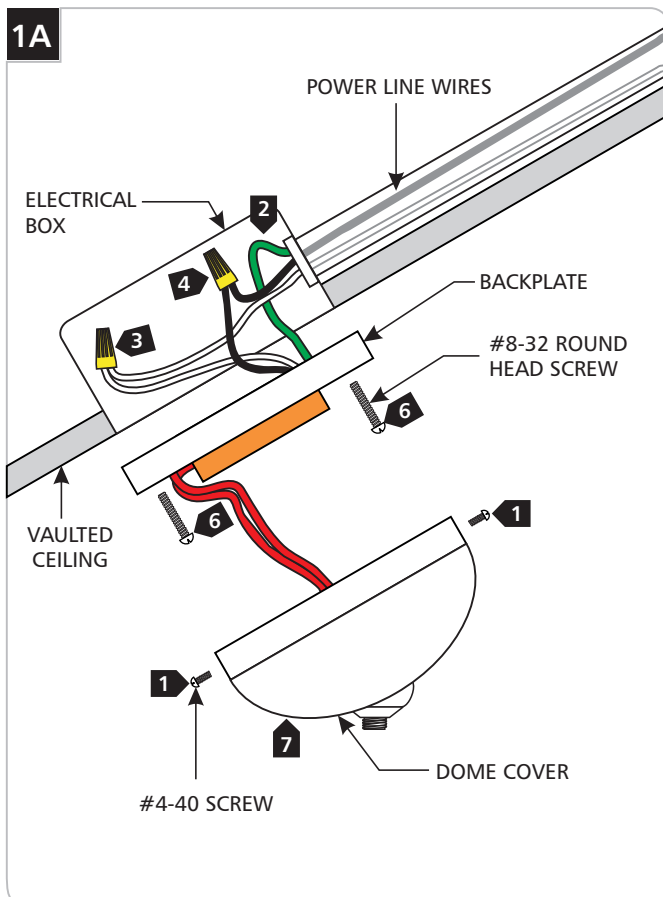

- 1** Remove the #4-40 screws on canopy sides to remove the surface dome cover from the backplate.
- 2** Connect the green transformer wire to a suitable ground in accordance with local electrical codes.
- 3** Connect the white transformer wire to the neutral power line wire with a wire nut.
- 4** Connect the black transformer wire to the hot power line wire with a wire nut.
- 5** Place all wires and wire nut connections into the electrical box.
- 6** Mount the backplate to the electrical box with the two #8-32 round head screws.
- 7** Replace the dome cover onto the backplate. Replace and tighten the two #4-40 screws.

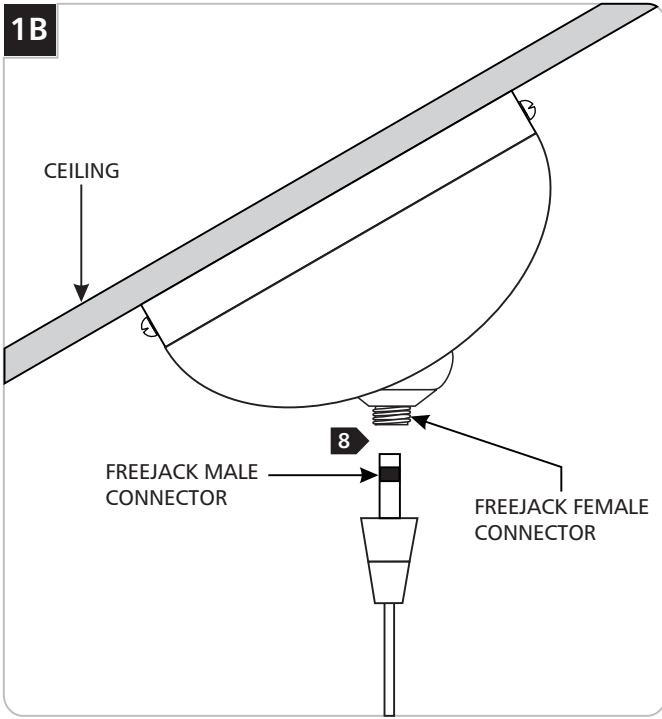

8 Screw the fixture FreeJack male connector into the FreeJack female connector.

SAVE THESE INSTRUCTIONS!



TECH LIGHTING®

7400 Linder Ave, Skokie, IL 60077

847.410.4400

www.techlighting.com

© 2008 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company