

Joni Ceiling

700FMJNI

1.1



CAUTION - RISK OF FIRE
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
 Use minimum 90°c supply conductors.

GENERAL PRODUCT INFORMATION:

This product is suitable for damp locations.

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product can be dimmed with most ELV or TRIAC dimmers.


This instruction shows a typical installation.



7400 Linder Ave, Skokie, IL 60077
 847.410.4400

www.techlighting.com


© 2019 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.
 A Generation Brands Company

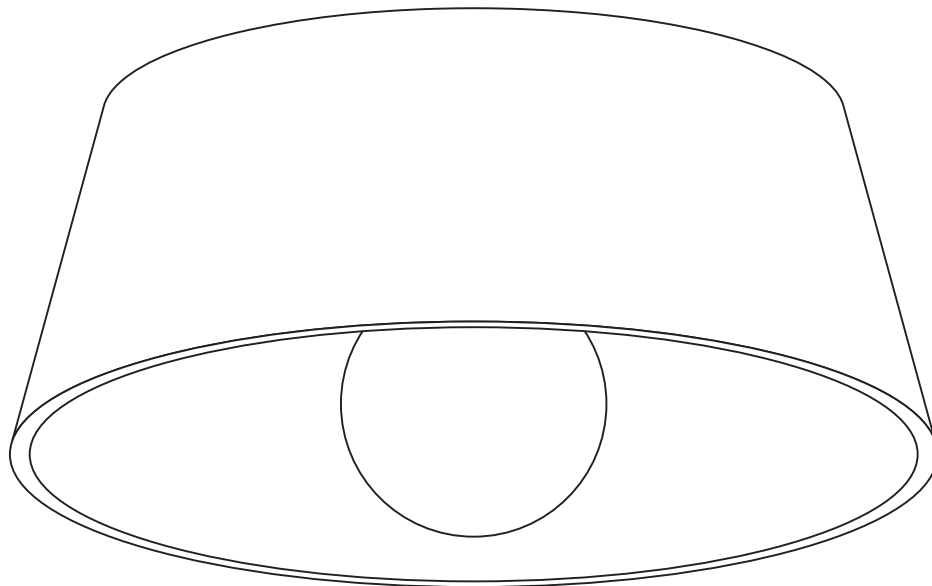

SAVE THESE INSTRUCTIONS!

Install the Fixture

1A

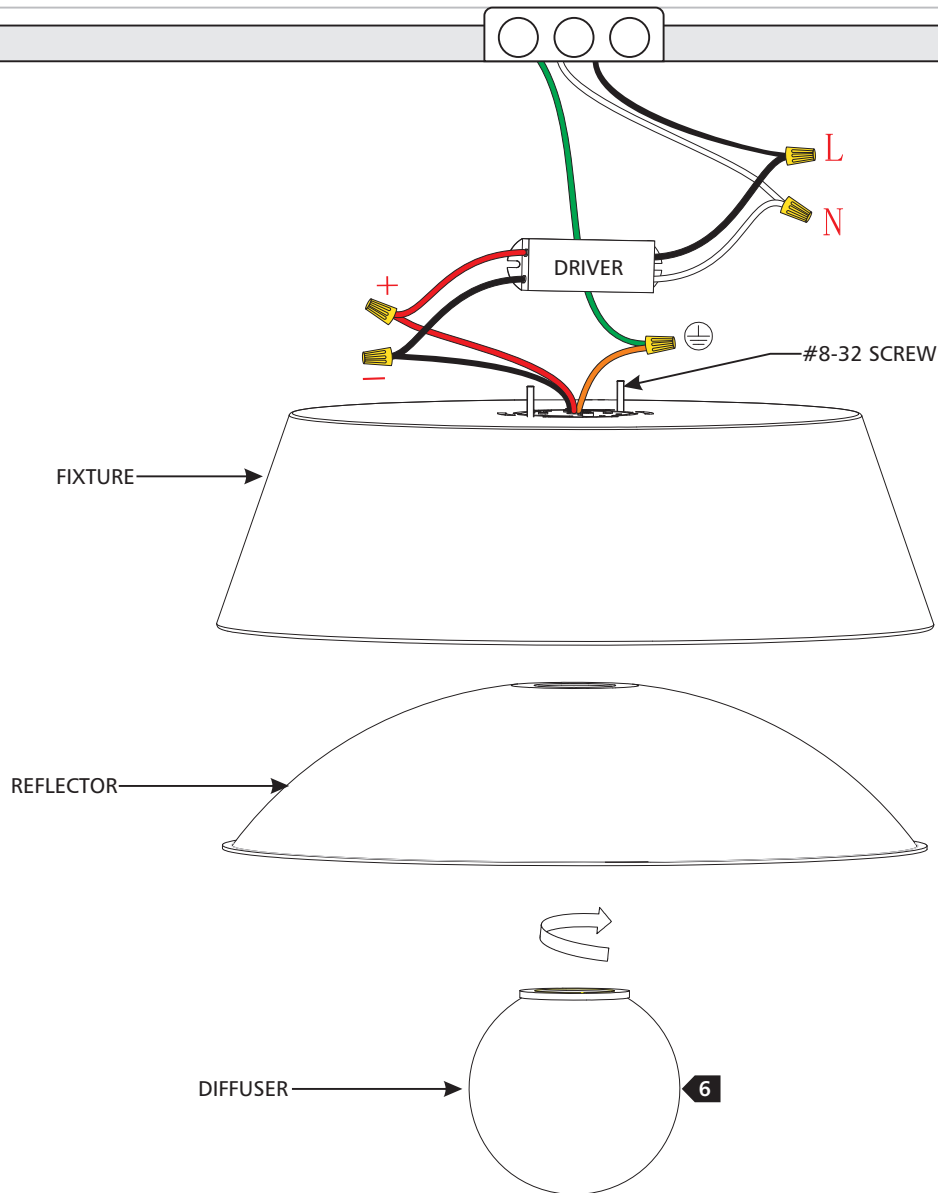

- 1 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 2 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 3 Connect the black fixture wire to the hot power line wire with a wire nut.
- 4 **For 277V Only:** If using 0-10V dimming, connect the purple and gray wires to a compatible dimmer. If not using 0-10V dimming, cap off the purple and gray wires.
- 5 Neatly place the driver, all wires, and wire nut connections inside the junction box, align the fixture holes with the junction box holes, and secure the mounting plate to the junction box with the #8-32 screws.
- 6 Insert the reflector into the fixture and secure it place by screwing the diffuser onto the fixture. Make sure that the diffuser is installed correctly before releasing. **Do not over tighten.**