

# Wythe Medium Wall

700WSWYT15\_ 1.0



**GENERAL PRODUCT INFORMATION:**  **These fixtures are intended to be installed utilizing NEC compliant junction boxes.**


This product is suitable for damp locations.

This product can be dimmed with most LED compatible ELV and Triac dimmers.

This instruction shows a typical installation.

**CAUTION - RISK OF FIRE**  
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
**Use minimum 90°C supply conductors.**


**SAVE THESE INSTRUCTIONS!**

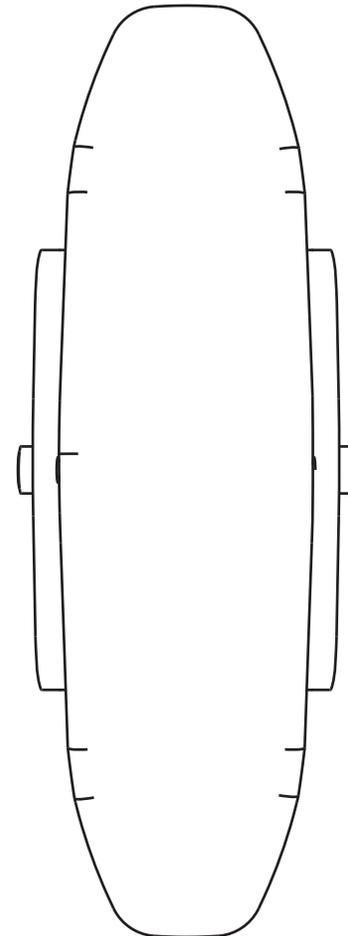

 **TECH LIGHTING**  
7400 Linder Ave., Skokie, IL 60077  
T 847.410.4400 | F 847.410.4500  
www.techlighting.com

# Install the Fixture

1A

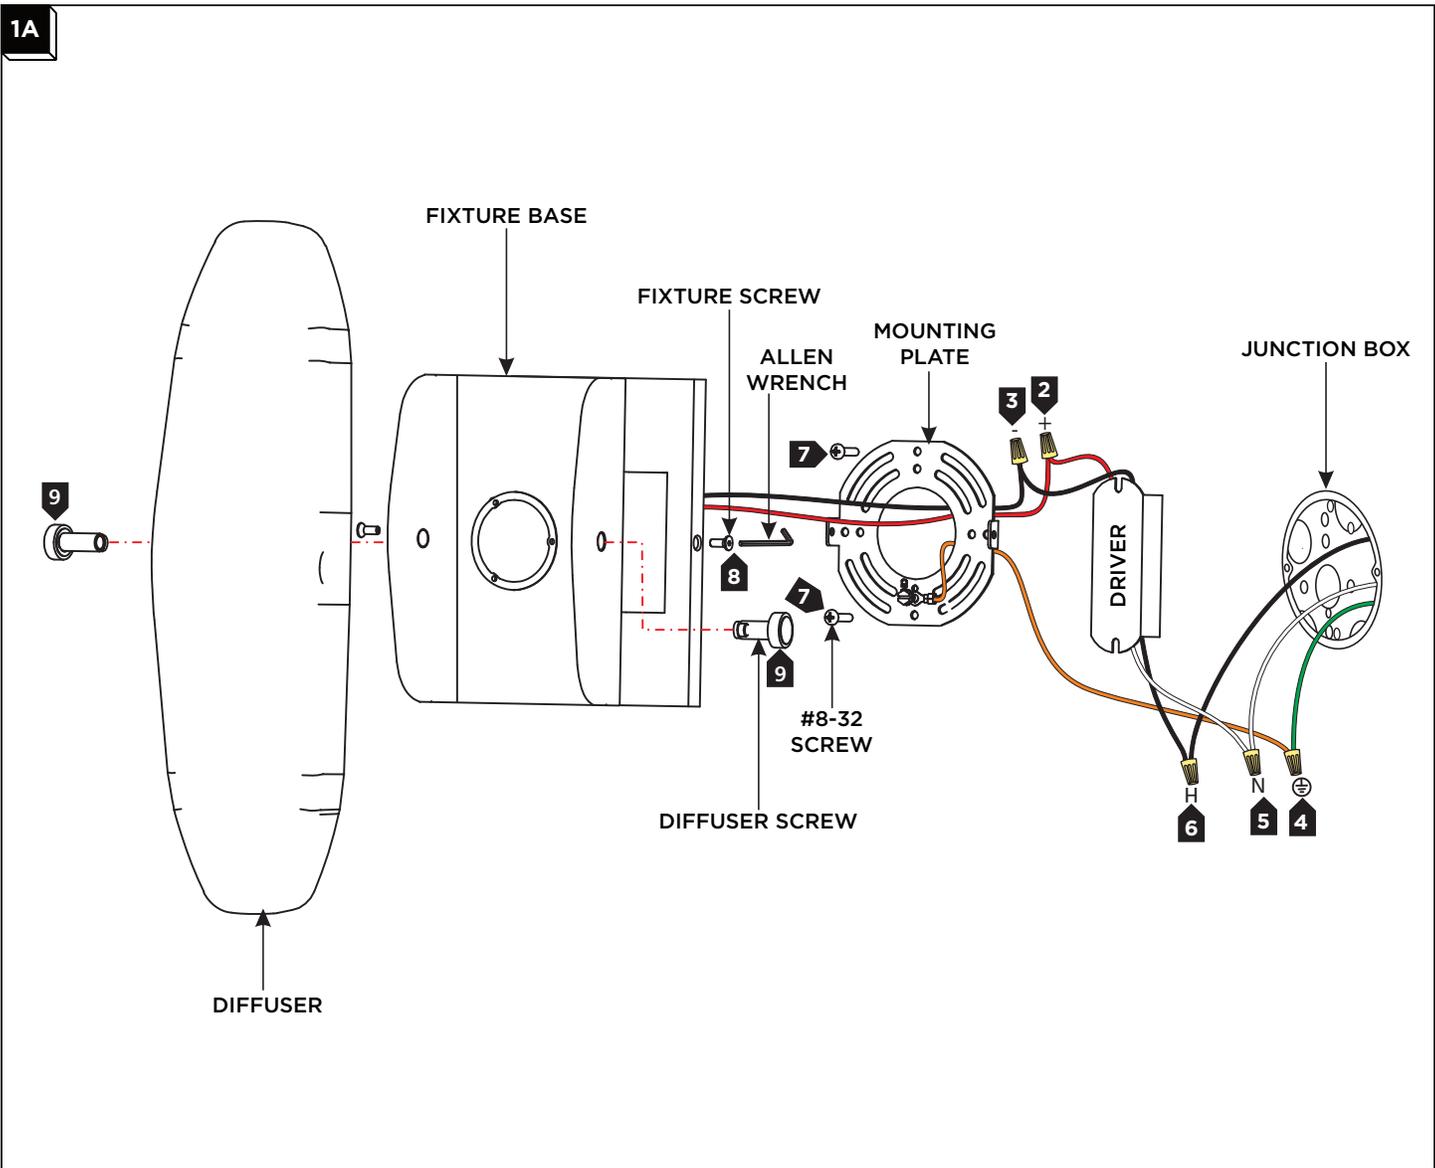

- 1 Separate the mounting plate from the fixture base by removing the fixtures screws with the provided Allen wrench.
- 2 Connect the negative (-) fixture wire to the negative (-) driver output wire with a wire nut.
- 3 Connect the positive (+) fixture wire to the positive (+) driver output wire with a wire nut.
- 4 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 5 Connect the white input driver wire to the neutral power line with a wire nut.
- 6 Connect the black input driver wire to the hot power line with a wire nut.
- 7 Properly place the driver, all wires, and wire nut connections into the junction box and install the mounting plate to the junction box with the two provided #8-32 screws.
- 8 Mount the fixture base onto the mounting plate, and secure it in place by tightening the set screws using the provided Allen wrench.
- 9 Install a diffuser onto the fixture base and secure it in place with a diffuser screw on each side.