

The Roton pendant makes an impressive design statement in the simplicity and scale of its cylindrical geometry. Featuring a spun aluminum body and subtle diffuser, the Roton pendant houses a powerful LED light source designed to deliver softly diffused down lighting for controlled and distinctive illumination.

### Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized lensing
- IP65 Rated

### Adjustable distance from ceiling

### SPECIFICATIONS

DELIVERED LUMENS	1320
WATTS	21
VOLTAGE	Universal 120-277V
DIMMING	0-10, ELV, TRIAC
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Ceiling
ADJUSTABILITY	Adjustable stem length (3", 6" and 12"). Integrated ball joint that accommodates sloped ceiling up to 45°.
CCT	2700K, 3000K or 4000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B1-U2-G1
DARK SKY	Non-compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70: >60,000 Hours
WARRANTY*	5 Years
WEIGHT	5.2 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

Please note, hanging outdoor fixtures are not meant for areas with high winds, which can cause damage to the fixture.

### ORDERING INFORMATION

PRODUCT	CRI / CCT	WIDTH	FINISH	VOLTAGE
700OPROT	927 90 CRI, 2700K	12 12"	Z BRONZE	UNV 120V-277V
	930 90 CRI, 3000K		H CHARCOAL	
	940 90 CRI, 4000K		B BLACK	

RIGID STEM ONLY (ADJUSTABLE 3", 6" AND 12" LENGTHS)




ROTON 12 PENDANT  
shown in charcoal



ROTON 12 PENDANT  
shown in bronze



ROTON 12 PENDANT  
shown in black

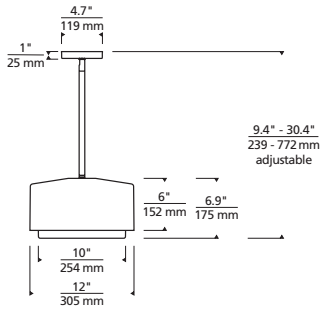


Roton Pendant

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### ROTON 12

Total Lumen Output: 1320  
 Total Power: 21  
 Luminaire Efficacy: 63  
 Color Temp: 4000K  
 CRI: 90+  
 BUG Rating: B1-U2-G1

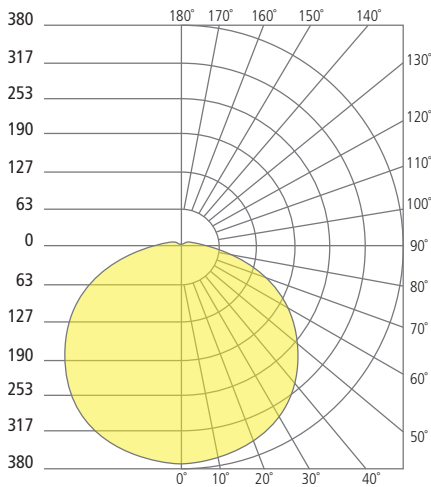

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2020 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark. Tech Lighting reserves the right to change specifications for product improvements without notification.

**TECH LIGHTING**

VISUAL COMFORT & Co.

7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400