

The Arkay Three LED bollard by Sean Lavin features an understated, contemporary design for outdoor lighting that blends beautifully with surrounding architecture and landscape details. The Arkay Three bollard is topped with a band of light that aims symmetrical illumination downward to create controlled pools of light, ideal for outdoor path and campus illumination.

- Marine-grade powder coat finish and stainless steel hardware
- Options: GFCI outlet, Photo Control, In-Line Fuse, Emergency Back-up
- Wet listed, IP65

## SPECIFICATIONS

|                           |   |
|---------------------------|---|
| DELIVERED LUMENS          | 1360  |
| WATTS                     | 15.25   |
| VOLTAGE                   | Universal 120-277V, with integral transient 2.5kV surge protection (driver)   |
| SECONDARY SURGE PROTECTOR | 10kA  |
| DIMMING                   | 0-10, ELV, Triac  |
| LIGHT DISTRIBUTION        | Symmetrical   |
| MOUNTING OPTIONS*         | Bolt  |
| PERFORMANCE OPTIONS       | GFCI / Photo Control / In-Line Fuse / Emergency Back-up   |
| CCT                       | 3000K or 4000K  |
| CRI                       | 80+   |
| COLOR BINNING             | 3 Step  |
| BUG RATING                | B1-U3-G1  |
| DARK SKY                  | Non-Compliant   |
| WET LISTED                | IP65  |
| GENERAL LISTING           | ETL   |
| CALIFORNIA TITLE 24       | Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required. |
| START TEMP                | -30°C   |
| FIELD SERVICEABLE LED     | Yes   |
| CONSTRUCTION              | Aluminum  |
| HARDWARE                  | Stainless Steel   |
| FINISH                    | Marine-Grade Powder Coat  |
| LED LIFETIME              | L70; >60,000 Hours  |
| WARRANTY**                | 5 Years   |
| WEIGHT                    | 17 lbs  |

\* Bollard base not suitable for branch circuit through wiring.  
 \*\*Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



ARKAY THREE BOLLARD shown in black




Shown with optional GFCI outlets

## ORDERING INFORMATION

| PRODUCT   | CRI/CCT           | LENGTH | FINISH  | VOLTAGE       | OPTIONS                 |
|-----------|-------------------|--------|---------|---------------|-------------------------|
| 7000BARK3 | 830 80 CRI, 3000K | 36 36" | B BLACK | UNV 120V-277V | NONE                    |
|           | 840 80 CRI, 4000K |        |         |               | LF IN-LINE FUSE         |
|           |                   |        |         |               | PC BUTTON PHOTO CONTROL |
|           |                   |        |         |               | EM EMERGENCY BACK-UP    |
|           |                   |        |         |               | GC GFCI*                |

\*GFCI OPTION CAN ONLY BE USED WITH 120V.

# ARKAY THREE BOLLARD




Arkay Three Bollard

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### ARKAY THREE BOLLARD

Total Lumen Output: 1360  
 Total Power: 15.25  
 Luminaire Efficacy: 89.2  
 Color Temp: 3079K  
 CRI: 81.3  
 BUG Rating: B1-U3-G1

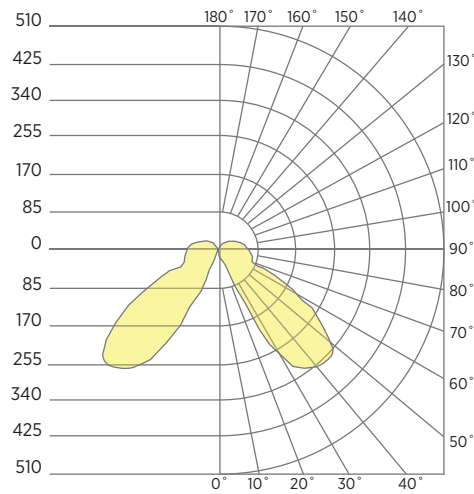

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---

