

PRODUCT FEATURES

- A linear elongated cylindrical suspension designed with striking LEDs when turned on and presents as modern décor when turned off
- Available in modern finishes as well as multiple sizes
- Complete the look with the Wit Pendants, also available in multiple sizes
- Includes four 6 inch & eight 12 inch stems in coordinating finish
- Can be installed on a sloped ceiling up to 45°
- Protected by a 5-year warranty. please visit the "About Us" Page on techlighting.com for more for warranty details



LAMPING

5 Glass. 120 volt, 81.9 watts, 3638 delivered lumens, 3000K, LED linear module. 6 Glass. 120 volt, 101.6 watts, 4604 delivered lumens, 3000K, LED linear module. 7 Glass. 120 volt, 121.3 watts, 5570 delivered lumens, 3000K, LED linear module. Dimmable with most LED compatible ELV and Triac dimmers. Includes four 6 inch & eight 12 inch stems in coordinating finish. Can be installed on a sloped ceiling up to 45°.

5-Glass/Aged Brass



5-Glass/Aged Brass

5-Glass/Black

6-Glass/Aged Brass

6-Glass/Black

To view all available finish options, please visit techlighting.com

ORDERING INFORMATION

| 700LSWIT | SHAPE OR SIZE | FINISH | LAMP |
|----------|---------------|--------------|--|
| | 5 5 GLASS | R AGED BRASS | -LED930 INTEGRATED LED 90 CRI 3000K 120-277V UNV (T24) |
| | 6 6 GLASS | B BLACK | |
| | 7 7 GLASS | | |

700LSWIT _____


JOB NAME _____

NOTES _____



SPECIFICATIONS

| | |
|-------------------------------|-------------|
| PRIMARY MATERIAL | Steel |
| SHADE MATERIAL | Glass |
| NET WEIGHT | 10 lbs |
| HEIGHT | 3.9in |
| WIDTH | 3.9in |
| LENGTH | 55.93in |
| UP LIGHT / DOWN LIGHT / BOTH? | |
| WET LISTED | |
| DAMP LISTED | Yes |
| DRY LISTED | |
| MIN. HANGING HEIGHT | 16.91in |
| MAX HANGING HEIGHT | 68.8in |
| TOTAL CORD LENGTH | |
| TOTAL STEM LENGTH | Up to 120in |
| STEM QTY | 12 |
| SLOPED CEILING ADAPTABLE? | Yes 45° Max |
| GENERAL LISTING | ETL Listed |
| INCLUDES | |

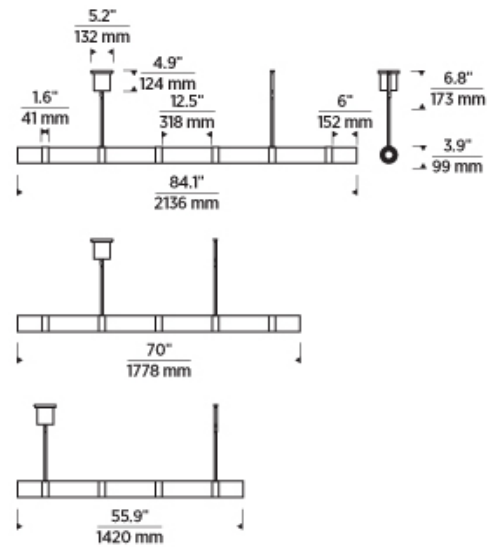

LAMPING SPECIFICATIONS

| | LED LAMP | INTEGRATED LED | NON LED | NO LAMP |
|-----------------------------|----------|--------------------------------|---------|---------|
| DELIVERED LUMENS | | 3638.0 4604.0 5570.0 | | |
| WATTS | | 81.9 101.6 121.3 | | |
| MAX WATTAGE PER BULB | | 81.9W | | |
| INPUT VOLTAGE/ DIMMING TYPE | | Universal 120V-277V ELV, TRIAC | | |
| CCT | | 3000K | | |
| CRI | | 90 CRI | | |
| LED LIFETIME | | | | |
| L70 | | >50000 | | |
| AVERAGE BULB HOURS | | | | |
| FIELD SERVICEABLE LED | | | | |
| LAMP BASE | | Integrated LED | | |
| LAMP SHAPE | | Integrated LED | | |
| LAMP INCLUDED? | | True | | |
| WARRANTY** | | 5 Years | | |

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 / JA8 INFORMATION

| | Integrated LED | Replacement LED Lamp | No Lamp * |
|---|----------------|----------------------|-----------|
| This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6 / JA8. | Yes | | |
| This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California. | N/A | | |

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

