

# POWER SUPPLY PHASE DIMMING REMOTE 24VDC




## PRODUCT FEATURES

Remote Power Supply for dimming down to 0.2%. 120V input voltage with 24V DC output available in 60W and 100W. Enclosure included.



## LAMPING

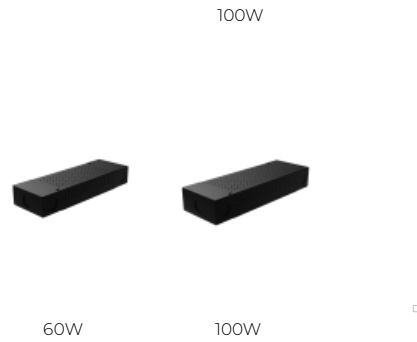

## ORDERING INFORMATION

ESPR	WATTAGE	OUTPUT VOLTAGE	CONTROLS	INPUT VOLTAGE
	060 60W	24 24VDC	ELV ELV/TRIAC-120V ONLY	120 120V
	100 100W			

ESPR \_\_\_\_\_

JOB NAME \_\_\_\_\_


NOTES \_\_\_\_\_



# POWER SUPPLY PHASE DIMMING REMOTE 24VDC

## SPECIFICATIONS

HARDWARE MATERIAL
SHADE MATERIAL
NET WEIGHT
HEIGHT
WIDTH
LENGTH
WET LISTED
DAMP LISTED
DRY LISTED
GENERAL LISTING
INCLUDES

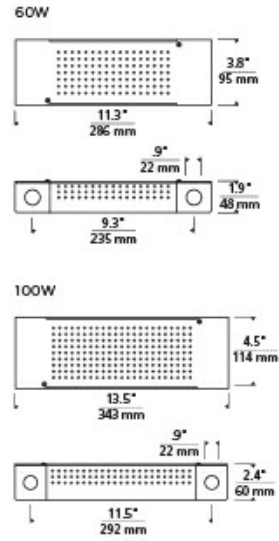

## LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS				
WATTS				
MAX WATTAGE PER BULB				
INPUT VOLTAGE			120VV	
DIMMING TYPE*				
CCT				
CRI				
LED LIFETIME				
L70				
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE				
LAMP SHAPE				
LAMP INCLUDED?			Y	
WARRANTY**				

\* Dimming information available at [www.techlighting.com/Downloads#dimming](http://www.techlighting.com/Downloads#dimming)  
 \*\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

## T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 <b>Title 24</b> Part 6.			Yes
This product can be used to comply with California Appliance Efficiency Standards 2016 <b>Title 20</b> and may be shipped to and sold in California.			Yes

\* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

