

Featuring a thick, square polished pressed-glass shade suspended from a die-cast base, the modern Boxie's LED light source beautifully illuminates a space without calling attention to itself. It easily mounts to the ceiling or wall for ultimate flexibility.

### High quality LM80-tested LEDs

for consistent long-life performance and color

### Outstanding protection against the elements:


- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

### Ceiling or wall mounting option


## SPECIFICATIONS

DELIVERED LUMENS	1192 LED
WATTS	23 LED
VOLTAGE	120V, 277V (LED only)
DIMMING	ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall or Ceiling
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B1-U3-G1
DARK SKY	Compliant (Ceiling)
WET LISTED	IP65
GENERAL LISTING	ETL, Title 24
START TEMP	-30°C
FIELD SERVICEABLE LED	No
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



BOXIE LARGE  
shown in bronze



BOXIE LARGE  
shown in charcoal




## ORDERING INFORMATION

7000WBX	SHAPE	CRI/CCT	FINISH	VOLTAGE
L	LARGE - 9"	830 80 CRI, 3000K 840 80 CRI, 4000K INC INCANDESCENT*	Z BRONZE H CHARCOAL	120 120V 277 277V

\*120V ONLY

# BOXIE LARGE WALL/CEILING




Boxie Large

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### BOXIE LARGE

- Total Lumen Output: 1192
- Total Power: 23
- Luminaire Efficacy: 51.8
- Color Temp: 3000K
- CRI: 80+
- BUG Rating: B1-U3-G1

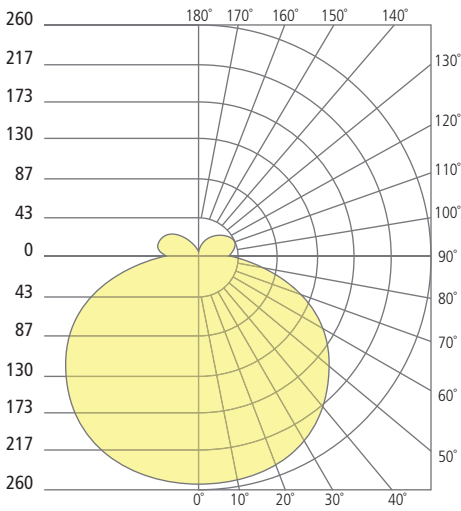

## PROJECT INFO

FIXTURE TYPE & QUANTITY	JOB NAME & INFO	NOTES



GENERATION BRANDS  
 7400 Linder Avenue, Skokie, Illinois 60077  
 T 847.410.4400 F 847.410.4500