


# LOW - VOLTAGE PENDANTS

## Firefrit Pendant LED SORAA T20

### DESCRIPTION

The Firefrit pendant from Tech Lighting launched in 2007 and has since grown in popularity due to its colorful twist on the popular Fire pendant. The Firefrit features a brilliant frit glass giving it a bold yet sophisticated appeal. Murano glass surrounds a frosted raindrop diffuser concealing the lamping inside. At 7.3" in length and 4.5" in diameter the Firefrit is ideal for kitchen island task lighting, dining room lighting, and countless commercial lighting applications. The Firefrit pendant is one of five Fire pendants available from Tech Lighting – simply search for the Firefrit pendant to find its close relatives. Pair this pendant with the Monorail system by Tech Lighting for greater design customization. Includes low-voltage, 50 watt halogen bi-pin lamp or 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module and six feet of field-cutttable cable. Dimmable with low-voltage electronic or magnetic dimmer (based on transformer). Works with SORAA.

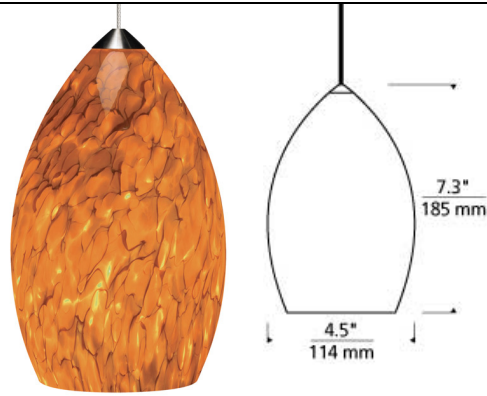

tahoe pine amber

### INSTALLATION

Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system. For use on T~TRAK, order FreeJack version and T~TRAK FreeJack Connector (sold separately).

### ACCESSORIES & OPTICAL CONTROLS

SORAA® LED Bi-Pin Replacement Pendant Module, Swag Hook

### WEIGHT

2lb / 0.91kg ±



tahoe pine amber

white frit

### ORDERING INFORMATION

| 700 SYSTEM | FIRY                 | COLOR              | FINISH           | LAMP  |
|------------|----------------------|--------------------|------------------|---|
| FJ         | FREEJACK             | A TAHOE PINE AMBER | Z ANTIQUE BRONZE | 12 VOLT HALOGEN (T20)                       |
| KL         | KABLE LITE           | W WHITE FRIT       | C CHROME         | -LEDS930 12 VOLT LED 90 CRI 3000K (T20/T24) |
| MP         | MONOPOINT            |                    | S SATIN NICKEL   | -24 24 VOLT HALOGEN                         |
| MO         | MONORAIL             |                    |                  |   |
| MO2        | TWO-CIRCUIT MONORAIL |                    |                  |   |

Note: Note: MP includes 4" Round Flush Canopy.

Antique Bronze is not available for Kable Lite.

When installing LED option on MO2 only magnetic transformers may be used.

Chrome not offered on Monorail & Two~Circuit Monorail.

Chrome not offered on Monorail & Two~Circuit Monorail.



700 \_\_\_\_ FIRY \_\_\_\_\_

FIXTURE TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_