

# MULTI-PORT CHANDELIERS

## FreeJack Rectangle Canopy 7-port LED



### DESCRIPTION


Mounts to a standard 4" junction box with round plaster ring (provided by electrician). 42"L x 14"W x 2.5" Depth Drywall anchors included for additional support. Includes electronic transformers and 7 low-voltage FreeJack ports.

### INSTALLATION

This product can mount to either a 4" square electrical box with round plaster ring or an octagonal electrical box (not included). For ceiling only. Transformers (included) fit in canopy.

### WEIGHT

35lb / 15.88kg ±

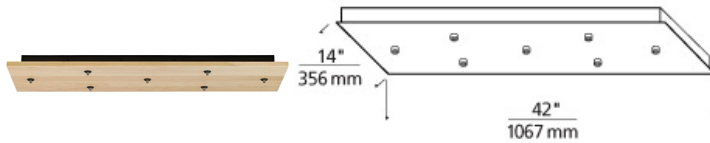

maple wood



maple wood

metal

walnut wood

### ORDERING INFORMATION

700FJLD7 SHAPE OR SIZE	COLOR	FINISH	VOLTAGE
RECTANGLE 7 PORT LINEAR INTEGRAL TRANSFORMER	<b>M</b> MAPLE WOOD <b>T</b> METAL <b>W</b> WALNUT WOOD	<b>Z</b> ANTIQUE BRONZE <b>S</b> SATIN NICKEL	- 120V IN/12V OUT LED <b>LED</b>

For use with any seven 12 Volt LED FreeJack pendants (sold separately). Consult factory for use with 12 volt LED FreeJack Heads.



**TECH LIGHTING®**

7400 Linder Avenue  
Skokie, Illinois 60077

T 847.410.4400  
F 847.410.4500

Tech Lighting, L.L.C.

700FJLD7 \_\_\_\_\_

FIXTURE TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



©2017 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.