

# MULTI-PORT CHANDELIERS

## Line-Low Voltage Round Canopy 11-port LED




### DESCRIPTION

Mounts to a standard 4" junction box with round plaster ring (provided by electrician). 24" Diameter Drywall anchors included for additional support. Includes electronic transformers, 5 low-voltage FreeJack ports, and 6 line-voltage PowerJack ports.

### INSTALLATION

This product can mount to either a 4" square electrical box with round plaster ring or an octagonal electrical box (not included). For ceiling only. Transformers (included) fit in canopy.

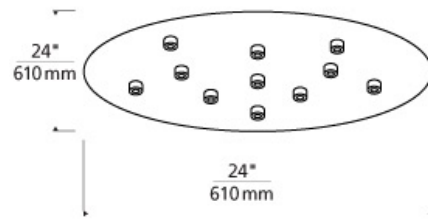

metal

### OTHER

The following line-voltage pendants are compatible: Beacon, Benton, Cabo Grande, Clark, Cleo, Echo, Echo Grande, Emerge, Fino Large, Fino Small, Fire Grande, Fire Onyx, Henrik Grande, Hudson, Isella, Jayden Grande, Kiev Large, Liza Grande, Manette Grande, Melrose, Modele, Ovation, Parfum Grande, Peyton Grande, Piper Grande, Playa, Sara Grande, Soda, Wrightwood.

### WEIGHT

29lb / 13.15kg ±



maple wood



metal



walnut wood

### ORDERING INFORMATION

700FJPJRD11 SHAPE OR SIZE	COLOR	FINISH	VOLTAGE
ROUND 11 PORT HYBRID LINE-LOW VOLTAGE	<b>M</b> MAPLE WOOD <b>T</b> METAL <b>W</b> WALNUT WOOD	<b>Z</b> ANTIQUE BRONZE <b>S</b> SATIN NICKEL	<b>-</b> 120V IN/12V OUT LED <b>LED</b>

For use with any five 12 Volt LED FreeJack pendants and six Line-Voltage Pendants. Consult factory for use with 12 volt LED FreeJack Heads.



**TECH LIGHTING®**

7400 Linder Avenue  
Skokie, Illinois 60077

T 847.410.4400  
F 847.410.4500

Tech Lighting, L.L.C.

700FJPJRD11 \_\_\_\_\_

FIXTURE TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



©2017 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.