

LOW - VOLTAGE PENDANTS

Zenith Pendant

DESCRIPTION

Slender, organic-shaped glass with vertical stringers to add depth and dimension. Includes low-voltage, 50 watt halogen bi-pin lamp or 8 watt replaceable 500 lumen 80 CRI 3000K LED SORAAA® module and six feet of field-cutttable suspension cable. Works with SORAA.

INSTALLATION

Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system.

ACCESSORIES & OPTICAL CONTROLS



SORAA® LED Bi-Pin Replacement Pendant Module

WEIGHT

2.02lb / 0.92kg ±



smoke

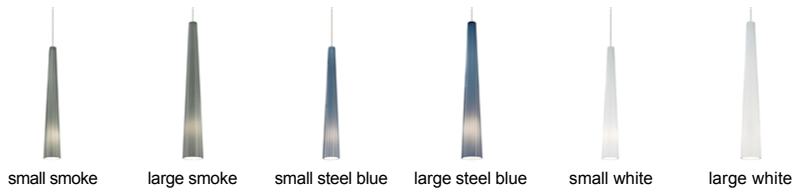

ORDERING INFORMATION

700	SYSTEM	ZEN	SHAPE OR SIZE	COLOR	FINISH	LAMP
FJ	FREEJACK	L	LARGE	K SMOKE	Z ANTIQUE BRONZE	12 VOLT HALOGEN
MP	MONOPOINT	S	SMALL	U STEEL BLUE	C CHROME	-LEDS830 12 VOLT LED 80 CRI 3000K
MO	MONORAIL			W WHITE	S SATIN NICKEL	-24 24 VOLT HALOGEN
MO2	TWO-CIRCUIT MONORAIL					

Note: MP includes 4" Round Flush Canopy. Note: MP includes 4 Round Flush Canopy.

When installing LED option on MO2 only magnetic transformers may be used.

Chrome not offered on Monorail & Two-Circuit Monorail.



TECH LIGHTING®
 7400 Linder Avenue T 847.410.4400
 Skokie, Illinois 60077 F 847.410.4500
Tech Lighting, L.L.C.

700 ____ ZEN _____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____

