


TENUR SQUARE 12 FLUSH MOUNT

PRODUCT FEATURES

- Designed with clean lines with the latest LED light guide technology
- Offered in two finishes (white and silver) and two shapes (round and square). Multiple sizes available.
- Dimmable with a low-voltage electronic dimmer.
- Mounts on wall or ceiling.
- ADA Compliant
- Protected by 5-year warranty with integrated LED

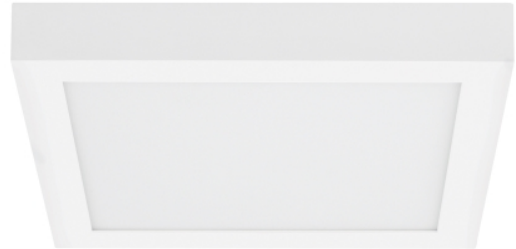

LAMPING

LED includes 30 watt 1400 lumen 90 CRI 3000K LED module. Dimmable with a low-voltage electronic dimmer. Mounts on wall or ceiling. ADA compliant.

White



White

ORDERING INFORMATION

700FMTNRS SHAPE OR SIZE	FINISH	LAMP
12 12	W MATTE WHITE	-LED930 INTEGRATED LED 90 CRI 3000K 120V
	I SILVER	-LED930-277 INTEGRATED LED 90 CRI 3000K 277V

700FMTNRS _____

JOB NAME _____


NOTES _____



TENUR SQUARE 12 FLUSH MOUNT



SPECIFICATIONS



HARDWARE MATERIAL	
SHADE MATERIAL	
NET WEIGHT	3 lbs
HEIGHT	1.5in
WIDTH	11.8in
LENGTH	11.8in
UP LIGHT / DOWN LIGHT / BOTH?	
WET LISTED	
DAMP LISTED	Yes
DRY LISTED	
WALL / CEILING MOUNT	
SLOPED CEILING ADAPTABLE?	No
GENERAL LISTING	ETL Listed
INCLUDES	

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS		1400		
WATTS		30		
MAX WATTAGE PER BULB		30W		
INPUT VOLTAGE		120V 277V		
DIMMING TYPE*		ELV		
CCT		3000K		
CRI		90 CRI		
LED LIFETIME				
L70				
AVERAGE BULB HOURS		35000		
FIELD SERVICEABLE LED				
LAMP BASE		Integrated LED		
LAMP SHAPE		Integrated LED		
LAMP INCLUDED?		Y		
WARRANTY**		5 Years		

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6.			
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

