

CRESCENDO 36 CHANDELIER

PRODUCT FEATURES

- Elegant cascading layered design
- Dainty free-floating illuminated arms
- Ideal for dining room lighting, living room lighting and foyer lighting
- Ships with an energy efficient halogen lamp
- Fully dimmable halogen lamping creates the desired ambiance
- Protected by a 1-year warranty



36in



36in

LAMPING

No Lamp version rated for (14) 12 volt 20 watt max. MR16 lamps. Halogen version includes (14) 12 volt, 20 watt MR16 lamps. Dimmable with a low-voltage electronic dimmer.

ORDERING INFORMATION

700CRES	SHAPE OR SIZE	FINISH	LAMP
	36L LONG 36" W X 168" L	S SATIN NICKEL	12V HALOGEN MR16
	36 STANDARD 36" W X 72" L		-NL NO LAMP

700CRES _____

JOB NAME _____


NOTES _____



CRESCENDO 36 CHANDELIER

SPECIFICATIONS

HARDWARE MATERIAL	Metal
SHADE MATERIAL	
NET WEIGHT	10 lbs
HEIGHT	48in
WIDTH	36in
LENGTH	36in
UP LIGHT / DOWN LIGHT / BOTH?	
WET LISTED	
DAMP LISTED	Yes
DRY LISTED	
MIN. HANGING HEIGHT	168in
MAX HANGING HEIGHT	168in
TOTAL CORD LENGTH	
TOTAL STEM LENGTH	
STEM QTY	
SLOPED CEILING ADAPTABLE?	No
GENERAL LISTING	ETL Listed
INCLUDES	

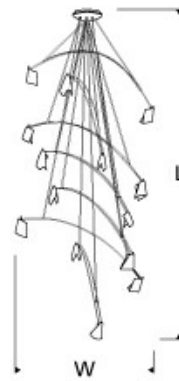

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS				
WATTS			20	20
MAX WATTAGE PER BULB			20W	20W
INPUT VOLTAGE			120V	120V
DIMMING TYPE*			ELV, TRIAC	ELV, TRIAC
CCT				Not Applicable
CRI				
LED LIFETIME				
L70				
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE			GU5.3	GU5.3
LAMP SHAPE			MR16	MR16
LAMP INCLUDED?			Y	N
WARRANTY**			1 Year	1 Year

*Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6.			
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

