

Spectica Wall

700WSSPCT | **1.0**



WALL

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is suitable for damp locations.


Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.




CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

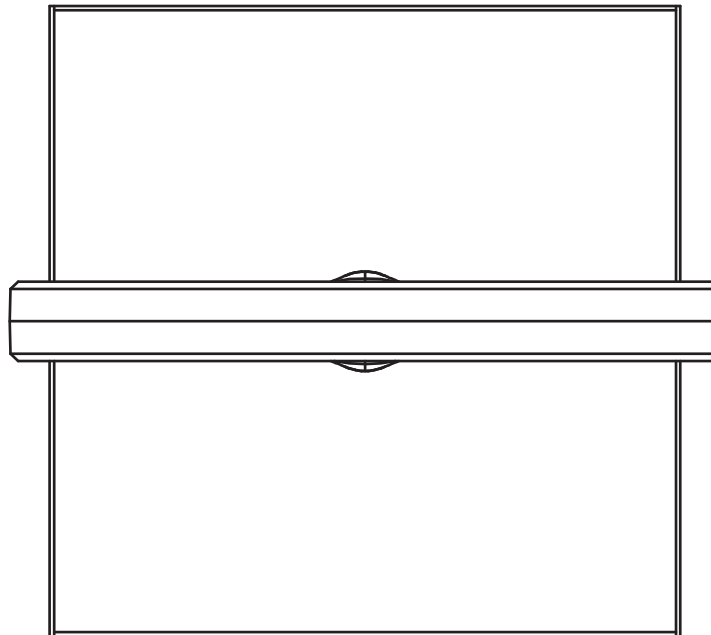

7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.techlighting.com

Install the Fixture

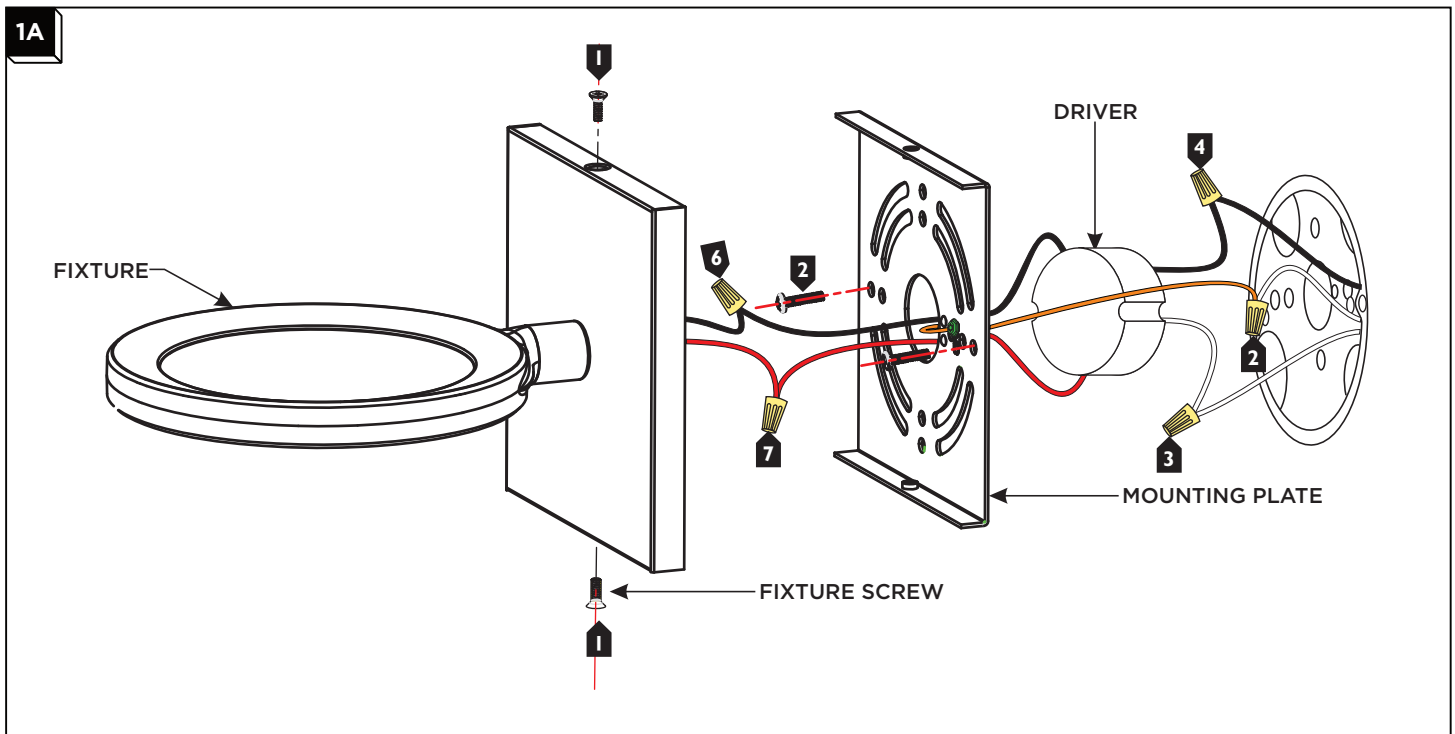

- 1 Remove the fixture screws located on the top and bottom of the fixture base using a screw driver, then remove the mounting plate from the fixture base.
- 2 Connect the fixture to suitable ground in accordance with local electrical codes.
- 3 Connect the white driver wire to the neutral power line wire with a wire nut.
- 4 Connect the black driver wire to the hot power line wire with a wire nut.
- 5 Properly place the driver, all wires, and wire nut connections into the electrical box, then install the mounting plate onto the electrical box with the two #8-32 screws provided.
- 6 Connect the black driver wire to the black fixture wire with a wire nut.
- 7 Connect the red driver wire to the red fixture wire with a wire nut.
- 8 Mount the fixture back onto the mounting plate and reinstall fixture screws (reversal of step 1).