

Paravo Pendant

700TDP MVP_ 1.0



PENDANTS

GENERAL PRODUCT INFORMATION:


These fixtures are intended to be installed utilizing NEC compliant junction boxes.




Incandescent version may be dimmed with a standard incandescent dimmer.

LED version may be dimmed with a LED or TRIAC dimmer. Consult lamp manufacturer for additional information.

Install the Fixture

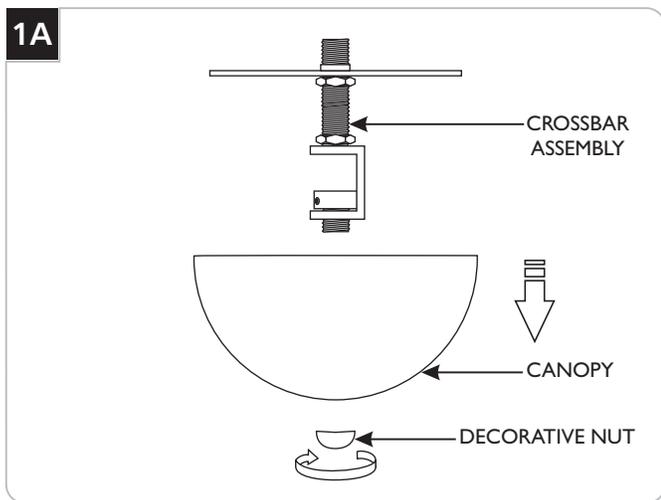


1 Separate the crossbar assembly from the canopy by unscrewing the decorative nut from the crossbar assembly.

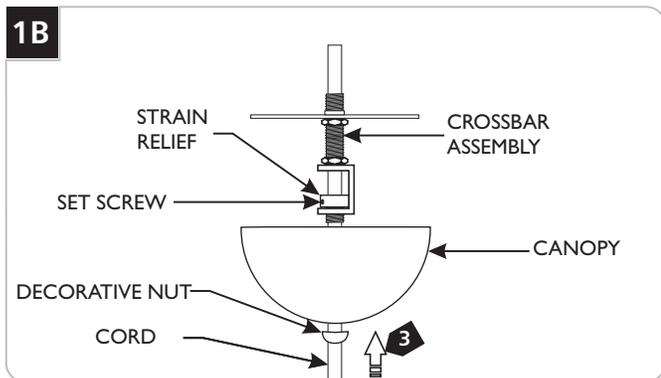


2 Loosen (**Do Not Remove**) set screw in the strain relief.

3 Feed fixture cord through decorative nut, canopy and crossbar assembly.

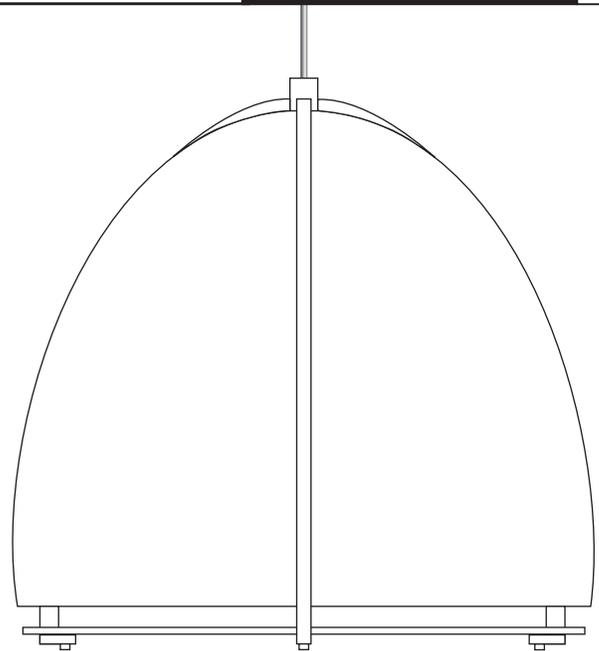


CAUTION - RISK OF FIRE
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
 Use minimum 90°C supply conductors.

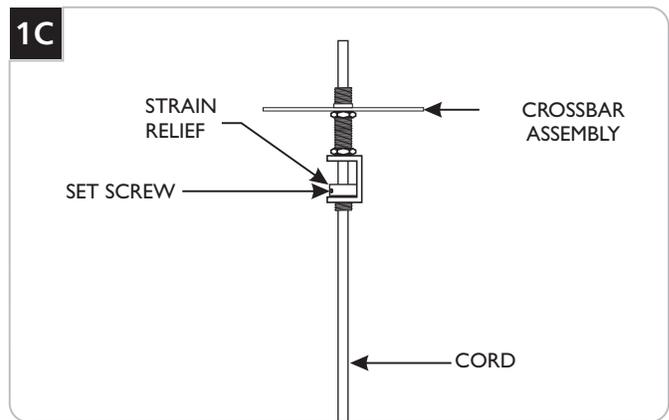


4 Adjust the fixture height (from bottom of the fixture shade to top of the canopy) by moving the crossbar assembly up or down.

5 When the desired height is achieved, tighten the set screw on the strain relief.

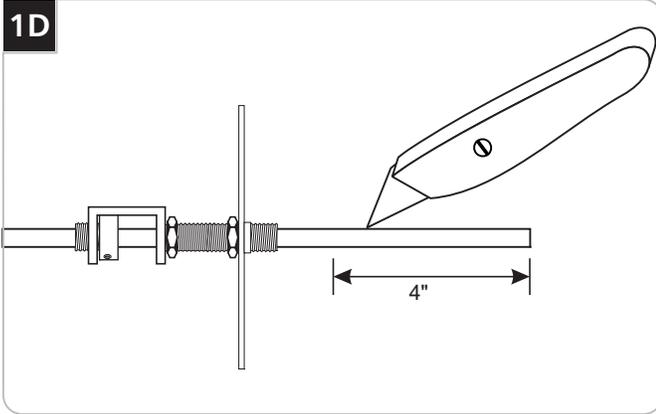


- 6 Leave 6" of the cord behind the canopy for power connections. Cut the excess cord.
- 7 From the end of the cord, strip the insulation 4" using a sharp knife. **Make sure not to nick the inner wires.**
- 8 Strip the end of the wires.

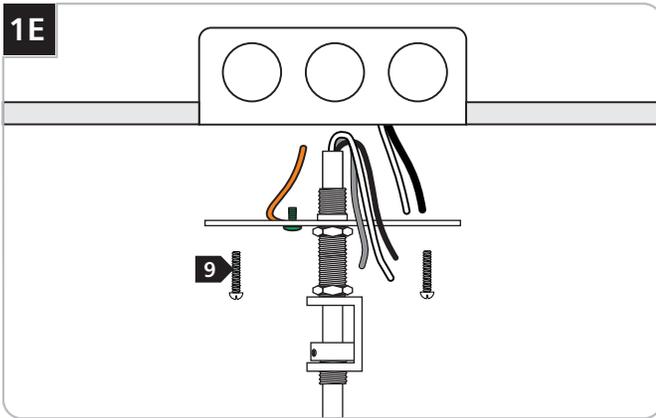


NOTE: The following steps will require two people. Please have an assistant support the fixture while an electrician completes the install.

- 9 Mount the fixture to the electrical box with the two #8-32 screws.

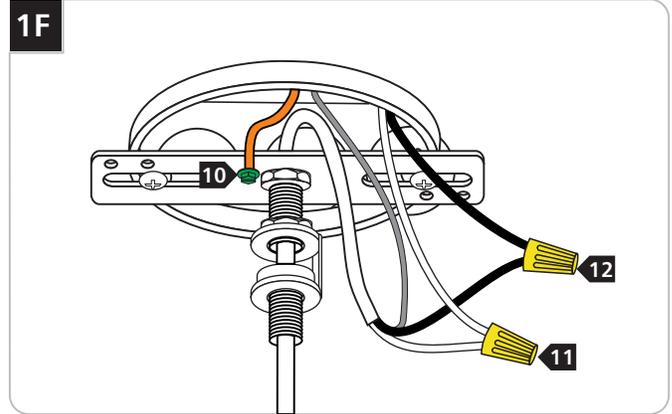


- 10 Connect the crossbar and the fixture ground wire to a suitable ground in accordance with local electrical codes.
- 11 Connect the fixture neutral wire (white wire) to the neutral power line wire with a wire nut.
- 12 Connect the hot fixture wire (black wire) to the hot power line wire with a wire nut.

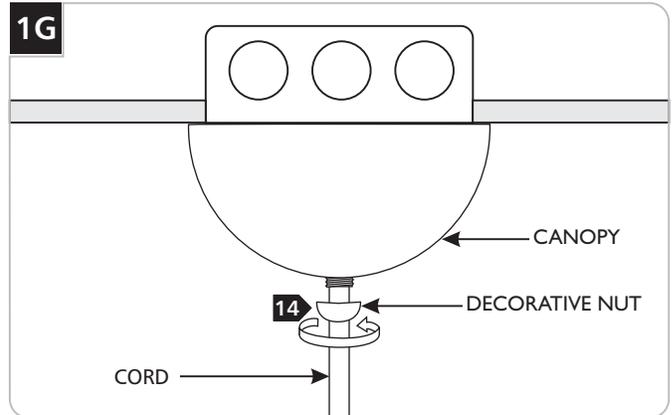

- 13 Place all wires and wire nut connections properly inside the canopy.
- 14 Slide the canopy up against the ceiling and secure it in place by tightening the decorative nut into the threaded rod. Do not turn the cord.


Install the Diffuser and Lamp

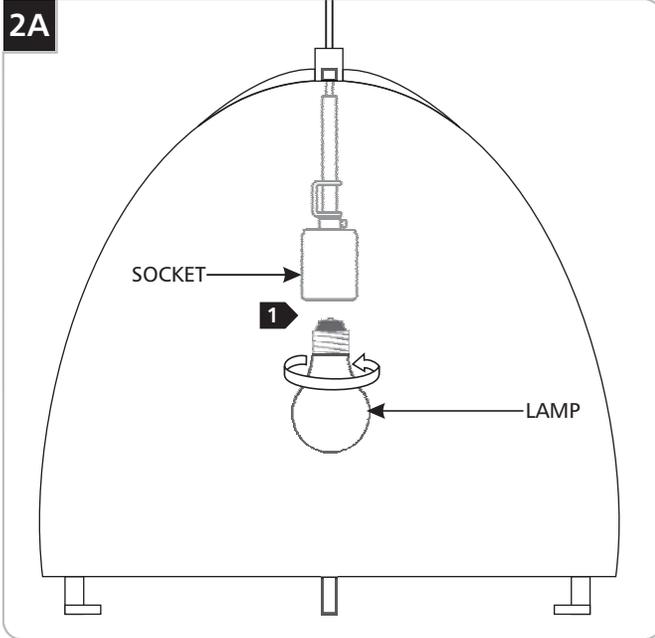


CAUTION: To reduce the risk of a burn or electric shock during re-lamping, disconnect the power to the fixture.

Refer to fixture marking for lamp information.

- 1 Screw the lamp into the socket.

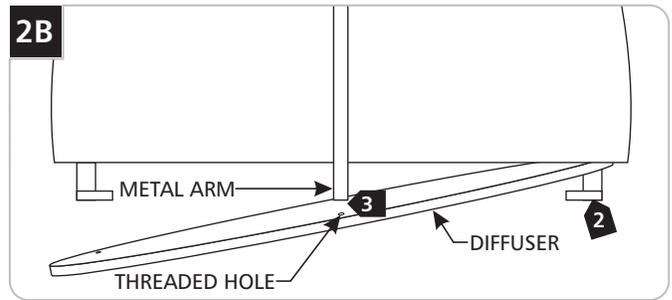

- 2 Angle the diffuser into position and rest it evenly on the metal arms of the fixture.
- 3 Align threaded holes in glass with each metal arm.

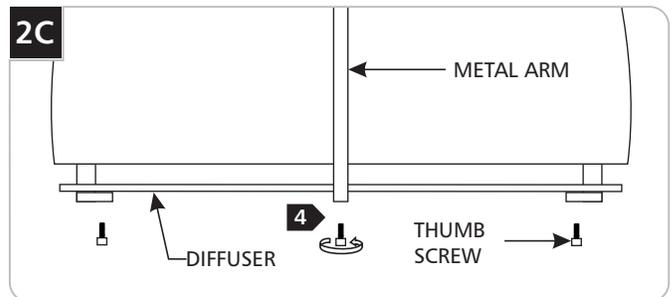

- 4 Screw a thumb screw through each metal arm and into each threaded hole in the diffuser.

SAVE THESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077
847.410.4400

www.techlighting.com

© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company