




GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

Suitable for damp locations.


This product may be mounted vertically or horizontally.

This product may be dimmed with a low-voltage electronic dimmer.

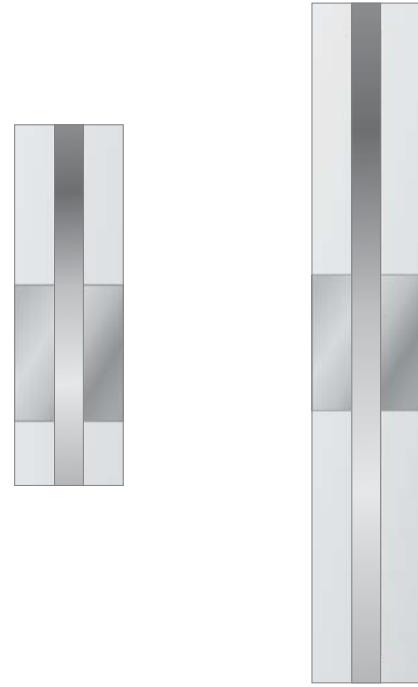


CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.


Install the Fixture

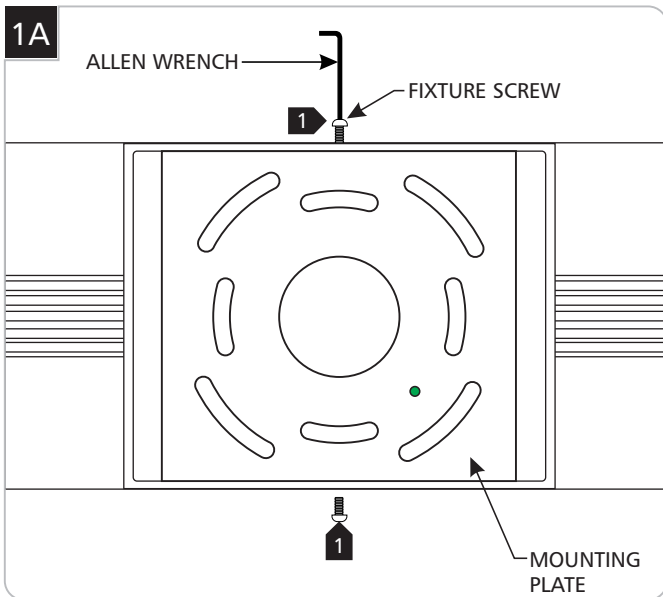


- 1** Remove the two fixture screws from the top and base of the fixture with the provided Allen wrench.
- 2** Remove the mounting plate from the back of the fixture.

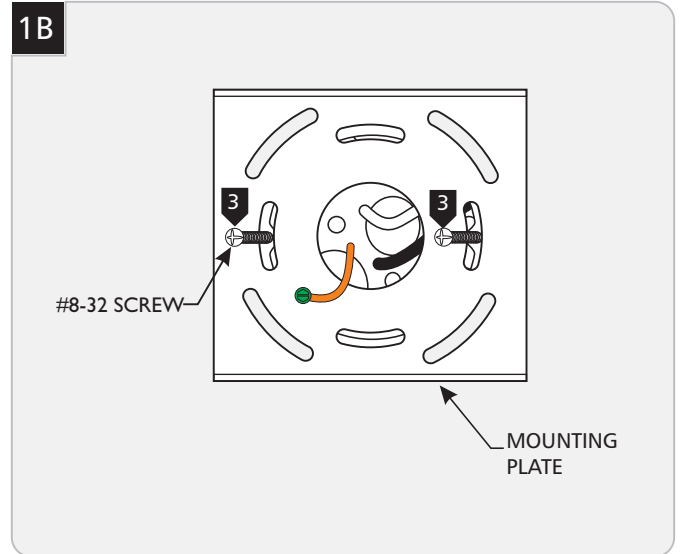

- 3** Secure the mounting plate to the electrical box with the provided #8-32 screws .

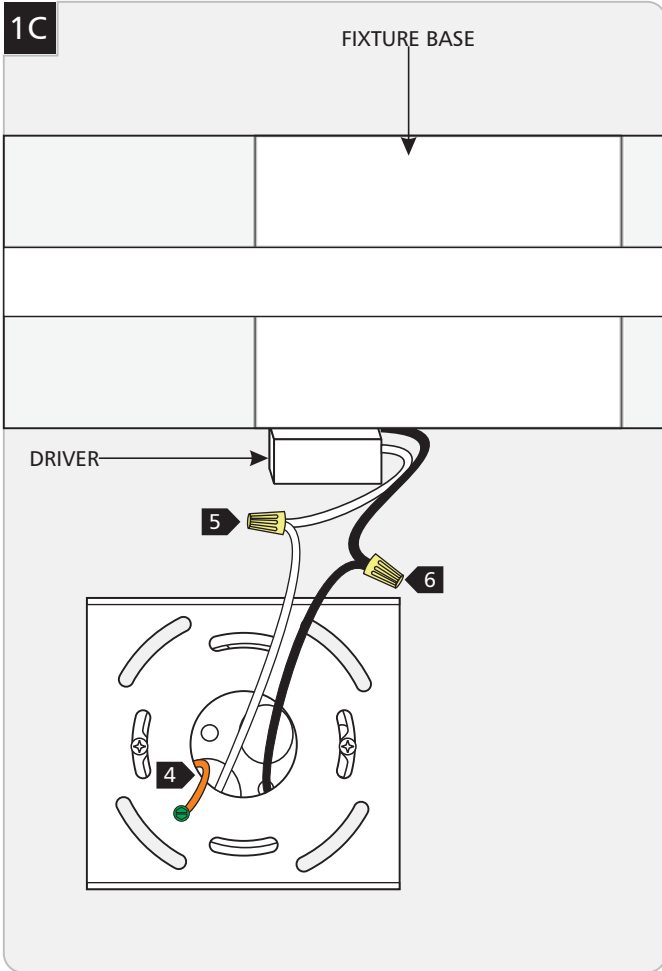

- 4 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 5 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 6 Connect the black fixture wire to the hot power line wire with a wire nut.
- 7 Properly place the driver, wires, and wire nut connections into the fixture base.

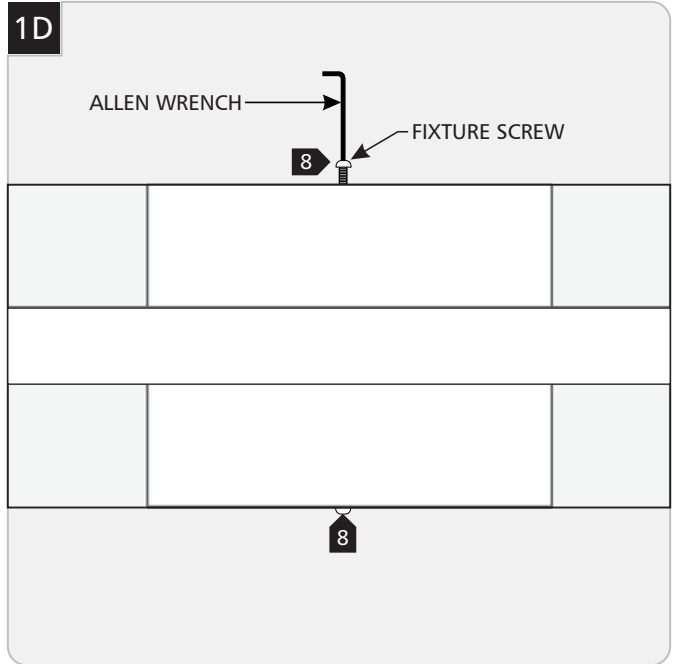

- 8 Mount the fixture by sliding it back onto the mounting plate and reinstalling the two fixture screws with the provided Allen wrench (reversal of figure 1A).

SAVE THESE INSTRUCTIONS!



TECH LIGHTING®

7400 Linder Ave, Skokie, IL 60077
847.410.4400

www.techlighting.com

© 2015 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.
A Generation Brands Company