

PRODUCT FEATURES



LAMPING

Includes two GX24Q-2 base 18 watt triple tube compact fluorescent lamps (electronic ballast included) or 20 watt, 1200 net lumen, 3000K LED modules. LED version dimmable with low-voltage electronic dimmer. May be mounted horizontally or vertically. ADA compliant.

Satin Nickel



Chrome

Satin Nickel

ORDERING INFORMATION

700BCALD	COLOR	FINISH	LAMP
	Y ACRYLIC	C CHROME S SATIN NICKEL	-LED930 LED 90 CRI 3000K 120V (T24) -LED930-277 LED 90 CRI 3000K 277V

700BCALD _____


JOB NAME _____

NOTES _____



SPECIFICATIONS

HARDWARE MATERIAL
SHADE MATERIAL
NET WEIGHT
HEIGHT
WIDTH
LENGTH
WET LISTED
DAMP LISTED
DRY LISTED
GENERAL LISTING
INCLUDES

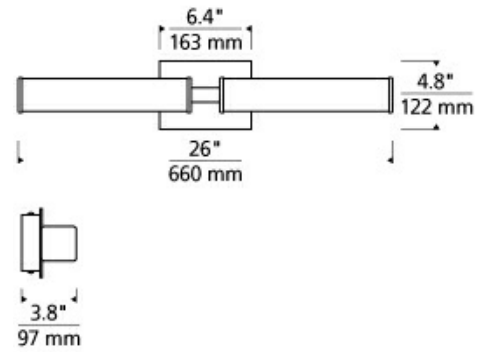

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS				
WATTS				
MAX WATTAGE PER BULB				
INPUT VOLTAGE				
DIMMING TYPE*				
CCT				
CRI				
LED LIFETIME				
L70				
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE				
LAMP SHAPE				
LAMP INCLUDED?				
WARRANTY**				

*Dimming information available at www.techlighting.com/Downloads#dimming
 ** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 / JA8 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6 / JA8 .			
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

